1882 LIGHTING
A QSSI Company

Thunderbolt

Baseball Series

- Easy 1-for-1 replacement of 1000w or 1500w Metal Halide
- Matching Beam patterns creates equivalent uniformity
- 5 degree horizontal and vertical aiming increments
- Weight and EPA allow for use of existing poles and cross arms

Photometric Performance

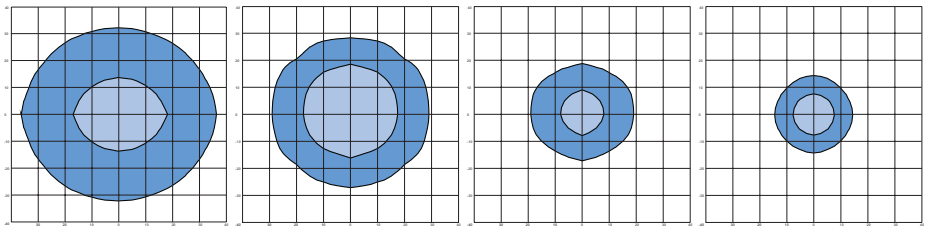

NEMA 5X5
Maximum Center Beam Candlepower = 117,631 Candela

NEMA 4X4
Maximum Center Beam Candlepower = 167,213 Candela

NEMA 3X3
Maximum Center Beam Candlepower = 463,808 Candela

NEMA 2X2
Maximum Center Beam Candlepower = 577,244 Candela

536w = 58,000-65,000 Lumens, 268W = 30,000-33,000 Lumens;
EPA =1.56 SQ FT, Weight = 68 LBS

Specifications

HOUSING:	LISTING:	HARDWARE:	WATTAGE:	LED ARRAYS:	OPTICS:	DRIVER:	CONTROLS:	MOUNT:
Die cast copper-free aluminum, no recycled content, automated silicone gaskets	CSA UL1598 Wet Location, IP66	Nickel-Plated Stainless Steel hardware	EasyLED 268w-536w	100% pure aluminum circuit boards with conformal coating	NEMA 2x2, 3x3, 4x4, 5x5 Clear Polycarbonate controlled beam lenses	120-277V, 50/60Hz or 347-480V, 50/60Hz; less than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming.	0-10 V cord for external system control	Steel Yoke with 5 degree horizontal and vertical increments, optional slip fitter bracket available

Order Information Example: **THB55536U5KGDF**

THB

Model	Beam	Wattage	Driver	CCT	Color	Options
THB=EasyLED Sports Lighter/ Architectural Flood	**22**=NEMA 2H x 2V **33**=NEMA 3H x 3V **44**=NEMA 4H x 4V **55**=NEMA 5H x 5V	**268**=268w **536**=536w	**U**=120-277V **H**=347-480V	**4K**=4000K **5K**=5000K	**G**=Gray **C**=Custom (Consult Factory)	**SF**=Single Fuse (120-277V Only) **DF**=Double Fuse (120-277V Only) **C53600B**=3 Foot Black Cord, 600VAC, 5 Wire, Includes 1-10V Dimming Wires



Dimensions

Length (D)	12¾″ (323mm)
Height (B)	16″ (405mm)

L70 25°C — 269,000 Hours

IP66

BUY AMERICAN ACT COMPLIANT

C SA US

150 Pemco Way, Wilmington, DE 19804 | Phone: 302-892-9000 | www.1882lighting.com

1882 LIGHTING
A QSSI Company

Thunderbolt
Baseball Series

Highly Uniform Performance Optics
Typical 6-Pole Baseball Field
70ft Mounting Height

Photometric Performance

Units	Calculation Area	Avg	Max	Min	Avg/Min	Max/Min	Grid Z
Footcandles	Baseball Infield	53.0	83.0	40.0	1.3	2.1	3 FT
Footcandles	Baseball Outfield	30.0	49.0	18.0	1.6	2.7	3 FT

IMPROVED Visual Comfort – Max/Min Ratio of 2.1/2.7 to 1 exceeds recommended level of 3.0 to 1

- Highly uniform Infield 2.1 to 1 Max to Min with Average to Minimum of 1.3 to 1
- Multiple layouts available: CLASS I – 50/30 FTC and CLASS II – 40/20 FTC
- 6 pole and 7 Pole designs; 6-Pole example shown
- 50-75% energy savings – long maintenance-free life

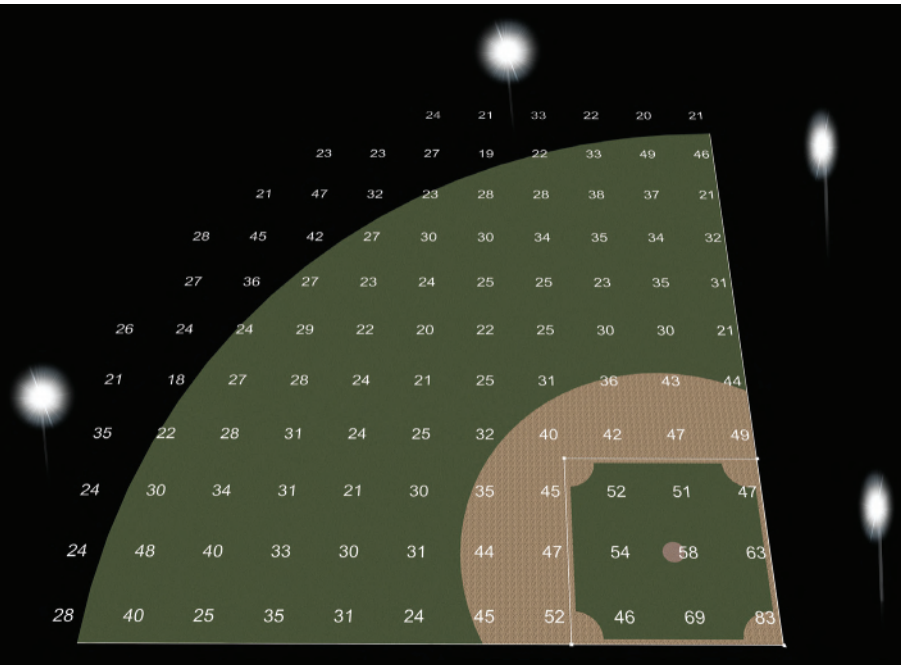

Pole/Luminaire Schedule

Poles	Total Fixture Qty	Catalog Number	LLF	Lumens	Watts
6 @ 70 FT	6	THB44536U5K NEMA 4x4	0.95	64,863	589
	36	THB33536U5K NEMA 3x3	0.95	61,735	589
	30	THB22536U5K NEMA 2x2	0.95	61,271	589

LEDicated

IP66

BUY AMERICAN ACT COMPLIANT

150 Pemco Way, Wilmington, DE 19804 | Phone: 302-892-9000 | www.1882lighting.com