London 2
LED Post Top & Pendant Mount

Specifications and Features:

Radiant™ LED
- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
- Static Colors Available - Consult Factory

Distribution
- Types I* II, III, IV, V (Type I Available in 70w & Higher Only)

Electrical
- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10V Dimmable Driver
- Standard Surge Protection Included (6kV Line-Line; 10kV Line-Earth)

Controls (Optional)
- Button eye photo control (PC)
- House Side Shield (H)
- 7-Pin Twist-Lock Receptacle (PCR7, C10 Capital Required)
- 3-Pin Twist-Lock Receptacle (PCR3, C10 Capital Required)

Housing
- Decorative Aluminum Capital Housing Choices with 3" Slip Fitter

Finish
- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

Listings & Ratings
- ETL Listed to UL 1598 Standard for Wet Location.
- LED is IP66 Rated

Warranty
- 5 Year Limited Warranty

EPA: 2.9
Weight: 42 lbs (Max.)

Order Information Example: LON2FAC1070W4KU5NBPCBK

LON2		C10								
Model	**Globe/Lens**	**Capital**	**Wattage**	**CCT**	**Voltage**	**Optics**	**Mounting**	**Finial**	**Options**	**Finish**
LON2=London 2 Radiant	**CA**=Clear Acrylic **CP**=Clear Polycarbonate **FA**=Frosted Acrylic **FP**=Frosted Polycarbonate **WA**=White (Opal) Acrylic **PA**=Pattern Acrylic **DA**=Seeded Acrylic	**C10**=PLC10	**40W**=40w **50W**=50w **60W**=60w **70W**=70w **80W**=80w **90W**=90w	**3K**=3000K **4K**=4000K **5K**=5000K	**U**=120-277V **H**=347/480V	**1**=Type I* **2**=Type II **3**=Type III **4**=Type IV **5**=Type V ***70W & Above Only**	**N**=Post Mount* **PEN**=Pendant Mount ***Standard Post Mount**	**H**=GF8* **B**=GF2 **C**=GF3 **D**=GF4 **F**=GF6 **I**=GF9 **J**=GF10 **K**=GF12 **O**=GF17 **P**=GF18 **V**=GF24 **N**=None ***Standard Finial**	**PC**=Button Eye Photo Control **H**=House Side Shield **PCR3**=3 Pin Twist Lock Receptacle*♦ **PCR7**=7 Pin Twist Lock Receptacle*♦ **N**=None ***Must use C10 Capital** **♦Photocell Not Included**	**STANDARD FINISHES** **BK**=Black **BZ**=Bronze **DBZ**=Dark Bronze **WH**=White **GR**=Green **SM**=Silver Metallic **GY**=Light Gray **TBK**=Textured Black **CC**=Custom Color (Consult Factory)

London 2

LED Post Top & Pendant Mount

Photometric Data

12” Radiant™

8” Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for London 2							
Wattage (Catalog Logic)		**40 Watts (40W)**	**50 Watts (50W)**	**60 Watts (60W)**	**70 Watts (70W)**	**80 Watts (80W)**	**90 Watts (90W)**
Radiant Size (DIA.)		**8"**	**8"**	**8"**	**12"**	**12"**	**12"**
Input Watts		**40.8**	**51.0**	**56.6**	**67.9**	**77.6**	**87.3**
Optic	**CCT**	**Delivered Lumens**					
1 = Type I Clear, Frosted, or Prismatic	**3K**	**NOT AVAILABLE**			8,165	9,331	10,498
	4K				8,335	9,525	10,716
	5K				8,461	9,670	10,879
	BUG Rating				B3-U3-G2	B3-U3-G2	B3-U3-G2
2 = Type II Clear, Frosted, or Prismatic	**3K**	4,703	5,878	7,055	8,230	9,405	10,582
	4K	4,800	6,001	7,200	8,401	9,600	10,801
	5K	4,874	6,091	7,310	8,528	9,747	10,965
	BUG Rating	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B3-U3-G2	B2-U3-G2
3 = Type III Clear, Frosted, or Prismatic	**3K**	4,695	5,869	7,043	8,217	9,390	10,564
	4K	4,792	5,991	7,188	8,387	9,584	10,783
	5K	4,866	6,081	7,298	8,514	9,731	10,947
	BUG Rating	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3
4 = Type IV Clear, Frosted, or Prismatic	**3K**	4,591	5,739	6,887	8,034	9,182	10,330
	4K	4,686	5,858	7,029	8,201	9,372	10,544
	5K	4,758	5,947	7,136	8,326	9,515	10,705
	BUG Rating	B1-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G3	B3-U3-G3
5 = Type V Clear, Frosted, or Prismatic	**3K**	4,804	6,005	7,207	8,407	9,608	10,809
	4K	4,903	6,130	7,355	8,582	9,807	11,033
	5K	4,979	6,222	7,467	8,712	9,956	11,201
	BUG Rating	B3-U3-G1	B3-U3-G1	B3-U3-G2	B3-U3-G2	B3-U3-G2	B4-U3-G2
5 = Type V with White Opal Lens	**3K**	3,857	4,821	5,785	6,750	7,714	8,679
	4K	3,937	4,921	5,906	6,890	7,874	8,858
	5K	3,997	4,997	5,996	6,995	7,994	8,993
	BUG Rating	B1-U4-G2	B2-U4-G3	B2-U5-G3	B2-U5-G3	B2-U5-G3	B3-U5-G4

Please refer to the fixture's IES file for detailed information. Subject to change.

London 2

LED Post Top & Pendant Mount

Capitals

PLC10 - 10 1/4" High

Fixture Finials

GF2 - 6"

GF3 - 6"

GF4 - 6"

GF5 (Plastic)
GF6 (Cast) - 4"

GF8 - 4"

GF9 - 4.25"

GF10 - 3.5"

GF12 - 2.75"

GF17 - 4"

GF18 - 2.75"

GF24 - 4.75"

London 2

LED Post Top & Pendant Mount
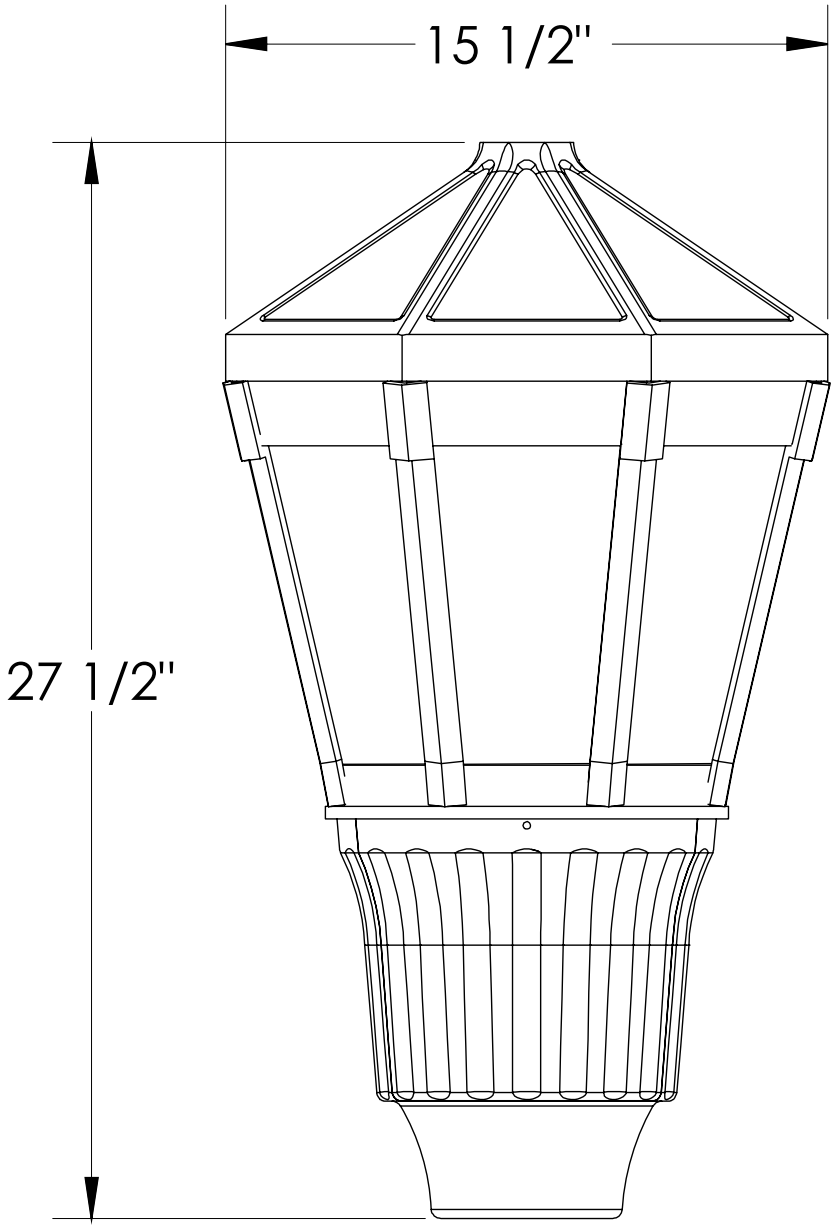
Dimensions