Citation
LED Post Top

Post Top

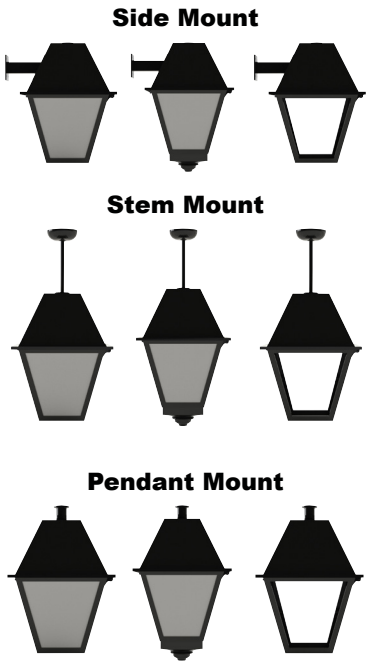

Specifications and Features:

Radiant™ LED
- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
- Static Colors Available - Contact Factory

Distribution
- Types I* II, III, IV, V (Type I Available in 70w & Higher Only)

Electrical
- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10V Dimmable Driver
- Standard Surge Protection Included (6kV Line-Line; 10kV Line-Earth)

Controls (Optional)
- Button Eye Photo Control (PC)
- 7-pin Twist-Lock Receptacle (PCR7) - Mounts on Top with GF26 (Y)
- 3-pin Twist-Lock Receptacle (PCR3)

Housing
- Cast Aluminum Cage, Roof and 3" Slip Fitter

Finish
- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

Listings & Ratings
- ETL Listed to UL 1598 Standard for Wet Location and IP66.
- LED is IP66 Rated

Warranty
- 5 Year Limited Warranty

EPA: 1.7
Weight: 26 lbs (Max.)

Quick Ship Options in Red

Order Information Example: CIT1NL60W4KU3ANNBK

CIT1

Model	Globe/Lens	Wattage	CCT	Voltage	Optics	Finial	Mounting	Options	Panes	Finish
CIT1=Citation Post Top	**NL**=No Secondary Lens **CA**=Clear Acrylic **CP**=Clear Polycarbonate **FA**=Frosted Acrylic **FP**=Frosted Polycarbonate **WA**=Opal White Acrylic **PA**=Pattern Acrylic **DA**=Seeded Acrylic	**40W**=40w **50W**=50w **60W**=60w **70W**=70w **80W**=80w **90W**=90w	**3K**=3000K **4K**=4000K **5K**=5000K	**U**=120-277V **H**=347/480V	**1**=Type I* **2**=Type II **3**=Type III **4**=Type IV **5**=Type V ***70W & Above Only**	**A**=GF1 **B**=GF2 **C**=GF3 **D**=GF4 **H**=GF8 **S**=GF21 **U**=GF23 **V**=GF24 **Y**=GF26 **N**=None	**N**=None (Standard Post Mount) **PEN**=Pendant Mount **STEM**-Pendant Mount with Stem* **CWB6**=Cast Wall Bracket for 6" Wall Mount* **CWB15**=Cast Wall Bracket for 15" Wall Mount* ***GF2, GF3, GF4, GF8 & GF24 finials only (does not apply to bottomless configuration)**	**N**=None **PC**=Button Eye Photo Control **GCL**=Glass Chimney, Large **PCR3**=3 Pin Twist Lock Receptacle♦ **PCR7**=7 Pin Twist Lock Receptacle*♦ ***Must use GF26 (Y) Finial** **♦Photocell not included**	**(Blank)**=No Panes **H1**=Square **H2**=Cross **H3**=Double Cross **H4**=Cross with Circle	**STANDARD FINISHES** **BK**=Black **BZ**=Bronze **DBZ**=Dark Bronze **WH**=White **GR**=Green **SM**=Silver Metallic **GY**=Light Gray **TBK**=Textured Black **CC**=Custom Color (Consult Factory)

Citation
LED Post Top

Photometric Data **For Lensed Fixtures**

12” Radiant™

8” Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Citation							
Wattage (Catalog Logic)		**40w (40W)**	**50w (50W)**	**60w (60W)**	**70w (70W)**	**80w (80W)**	**90w (90W)**
Radiant Size (DIA.)		**8”**	**8"**	**8"**	**12"**	**12"**	**12"**
Input Watts		**40.8**	**51.0**	**56.6**	**67.9**	**77.6**	**87.3**
Optic	**CCT**	**Delivered Lumens**					
1 = Type I Clear, Frosted, Prismatic or Seedy	**3K**	**NOT AVAILABLE**			8,165	9,331	10,498
	4K				8,335	9,525	10,716
	5K				8,461	9,670	10,879
	BUG Rating				B3-U3-G2	B3-U3-G2	B3-U3-G2
2 = Type II Clear, Frosted, Prismatic or Seedy	**3K**	4,703	5,878	7,055	8,230	9,405	10,582
	4K	4,800	6,001	7,200	8,401	9,600	10,801
	5K	4,874	6,091	7,310	8,528	9,747	10,965
	BUG Rating	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B3-U3-G2	B2-U3-G2
3 = Type III Clear, Frosted, Prismatic or Seedy	**3K**	4,695	5,869	7,043	8,217	9,390	10,564
	4K	4,792	5,991	7,188	8,387	9,584	10,783
	5K	4,866	6,081	7,298	8,514	9,731	10,947
	BUG Rating	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3
4 = Type IV Clear, Frosted, Prismatic or Seedy	**3K**	4,591	5,739	6,887	8,034	9,182	10,330
	4K	4,686	5,858	7,029	8,201	9,372	10,544
	5K	4,758	5,947	7,136	8,326	9,515	10,705
	BUG Rating	B1-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G3	B3-U3-G3
5 = Type V Clear, Frosted, Prismatic or Seedy	**3K**	4,804	6,005	7,207	8,407	9,608	10,809
	4K	4,903	6,130	7,355	8,582	9,807	11,033
	5K	4,979	6,222	7,467	8,712	9,956	11,201
	BUG Rating	B3-U3-G1	B3-U3-G1	B3-U3-G2	B3-U3-G2	B3-U3-G2	B4-U3-G2
5 = Type V with White-Opal Lens	**3K**	3,857	4,821	5,785	6,750	7,714	8,679
	4K	3,937	4,921	5,906	6,890	7,874	8,858
	5K	3,997	4,997	5,996	6,995	7,994	8,993
	BUG Rating	B1-U4-G2	B2-U4-G3	B2-U5-G3	B2-U5-G3	B2-U5-G3	B3-U5-G4

Please refer to the fixture's IES file for detailed information. Subject to change.

Citation
LED Post Top

Photometric Data **For Open Full Cutoff Fixtures**

12” Radiant™

8” Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Citation with No Secondary Lens							
Wattage (Catalog Logic)		**40w (40W)**	**50w (50W)**	**60w (60W)**	**70w (70W)**	**80w (80W)**	**90w (90W)**
Radiant Size (DIA.)		**8”**	**8"**	**8"**	**12"**	**12"**	**12"**
Input Watts		**40.8**	**51.0**	**56.6**	**67.9**	**77.6**	**87.3**
Optic	**CCT**	**Delivered Lumens**					
1 = Type I Clear PC Lens	**3K**	NOT AVAILABLE			7,291	8,332	9,374
	4K				7,442	8,505	9,568
	5K				7,555	8,634	9,714
	BUG Rating				B2-U0-G2	B2-U0-G2	B3-U0-G3
2 = Type II Clear PC Lens	**3K**	4,358	5,447	6,537	7,626	8,716	9,805
	4K	4,448	5,560	6,672	7,785	8,896	10,008
	5K	4,516	5,644	6,774	7,903	9,032	10,161
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G2
3 = Type III Clear PC Lens	**3K**	4,569	5,711	6,853	7,996	9,138	10,280
	4K	4,664	5,829	6,996	8,161	9,327	10,493
	5K	4,734	5,919	7,102	8,285	9,469	10,652
	BUG Rating	B2-U0-G2	B2-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3
4 = Type IV Clear PC Lens	**3K**	4,562	5,703	6,843	7,985	9,125	10,265
	4K	4,657	5,821	6,986	8,150	9,314	10,478
	5K	4,728	5,910	7,092	8,274	9,456	10,638
	BUG Rating	B1-U0-G2	B1-U0-G3	B1-U0-G3	B2-U0-G3	B2-U0-G3	B2-U0-G3
5 = Type V Clear PC Lens	**3K**	4,842	6,052	7,262	8,473	9,683	10,983
	4K	4,942	6,177	7,413	8,648	9,884	11,119
	5K	5,017	6,272	7,526	8,780	10,034	11,289
	BUG Rating	B3-U0-G1	B3-U0-G1	B3-U0-G2	B3-U0-G2	B3-U0-G2	B4-U0-G2

Please refer to the fixture's IES file for detailed information. Subject to change.

Citation
LED Post Top

Accessories & Replacement Parts:

Accessories (Order Separately, Field Installed)	
SSBS	Stainless Steel Bird Spikes

Style Options

Side Mount, No Lens, No Bottom

Side Mount, Lens, No Bottom

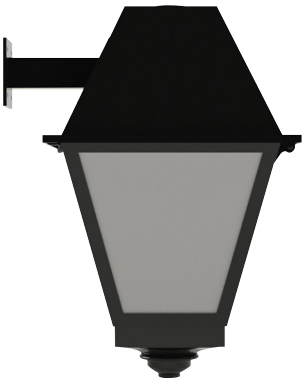

Side Mount, Lens, Bottom

Pendant Mount, No Lens, No Bottom

Pendant Mount, Lens, No Bottom

Pendant Mount, Lens, Bottom

Stem Mount, No Lens, No Bottom

Stem Mount, Lens, No Bottom

Stem Mount, Lens, Bottom

Citation
LED Post Top

Pane Options

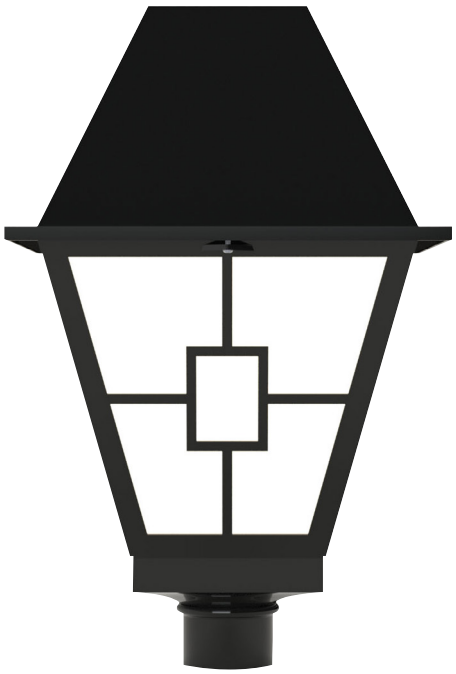

Citation 1 with Square Pane (H1)

Citation 1 with Cross Pane (H2)

Citation 1 with Double Cross Pane (H3)

Citation 1 with Cross and Circle Pane (H4)

Citation
LED Post Top

Dimensions

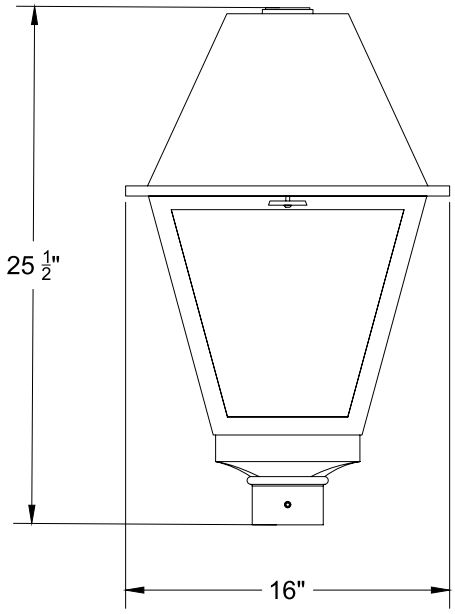



Side Mount, No Bottom



Pendant Mount, No Bottom



Stem Mount, No Bottom



Side Mount, with Bottom



Pendant Mount, with Bottom



Stem Mount, with Bottom

Citation
LED Post Top

Fixture Finials

GF1 - 6.5”

GF2 - 6"

GF3 - 6"

GF4 - 6"

GF8 - 4"

GF21 - 8”

GF23 - 8.5”

GF24 - 4.75"



GF26 - 4.25”