STRATUS

Outdoor Architectural Luminaire Family

1882 LIGHTING
A QSSI Company

AREA, FLOOD & WALL LIGHTING

BUY AMERICAN ACT COMPLIANT

STRATUS FAMILY

STR55Q STR45Q STR25Q STR15Q

ARCHITECTURAL AREA, FLOOD & WALL LIGHTING

Uniform Architectural Appearance and Seamless Aesthetic Style

60,000+ Lumens

Stratus PowerBolt
STR55Q
354-557 Input Watts; 27,500-72,500 Lumens
Replaces up to 1,500w HID

AREA LIGHTING APPLICATIONS

Large Stratus
STR45Q
177-281 Input Watts; 14,000-36,500 Lumens
Replaces up to 1,000w HID

Small Stratus
STR25Q
68-121 Input Watts; 6,200-16,000 Lumens
Replaces up to 400w HID

Architectural luminaires in four sizes designed for small pedestrian spaces to large parking areas.

- Available with IES Types I, II, III, IV and V optics.
- Ideal mounting heights are 12 to 50 feet.
- LED 24w-557w; 70w to 1500w HID replacement.
- Multiple mounting options including mounting arm, arm adaptor, slipfitter, swivel bracket and yoke.
- Control options include 3-pin or 7-pin twist lock photocell receptacle or motion sensor.
- 1-10V dimming driver standard, 120-277, 347, and 480VAC inputs available.

Mini Stratus
STR15Q
24-43 Input Watts; 1,620-4,900 Lumens
Replaces up to 175w HID

QUICK SHIP

IES LIGHTING DISTRIBUTIONS

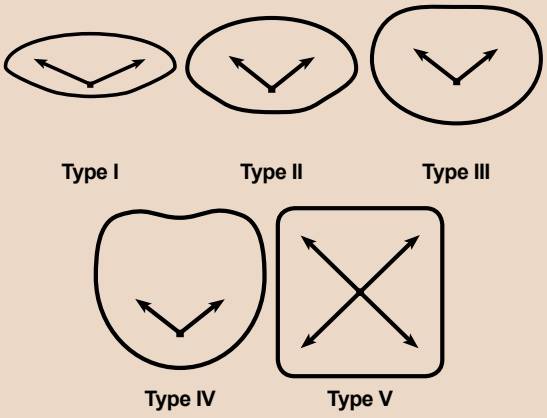

LED Area & Site Lighting Mounting Options

STR45Q with Stratus Arm

STR45Q with External Mount Slipfitter

STR45Q with Yoke

STR45Q with Pole Mounting Arm

STR45Q with Two-Piece Swivel Bracket

FLOOD LIGHTING APPLICATIONS

Architectural Flood Lights in four sizes allow illumination for signs, walls and monuments.

- Available with horizontal, wide and narrow beams.
- Ideal mounting heights are ground level to 50 feet.
- LED 24w-557w; 70w to 1500w HID replacement.
- Multiple mounting options including slipfitter, swivel bracket, knuckle and yoke.
- Options include wire guard and glare shield.
- 1-10V dimming driver standard, 120-277, 347, and 480VAC inputs available.

Flood Light Beam Options

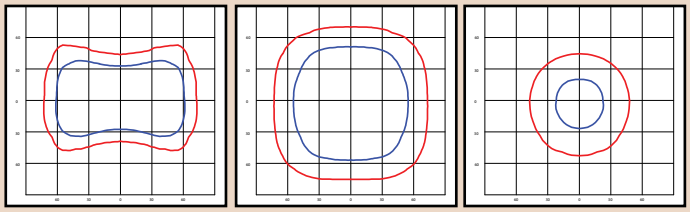

Type A	Type F	Type I
130°Hx70°V	110°Hx110°V	35°Hx35°V
NEMA 7x6	NEMA 7x7	NEMA 4x4

Stratus PowerBolt
STR55Q
354-557 Input Watts; 27,500-72,500 Lumens
Replaces up to 1,500w HID

Mini Stratus
STR15Q
24-43 Input Watts; 2,550-4,800 Lumens
Replaces up to 175w HID

Small Stratus
STR25Q
68-121 Input Watts; 6,100-16,000 Lumens
Replaces up to 400w HID

Large Stratus
STR45Q
177-281 Input Watts; 21,000-37,500 Lumens
Replaces up to 1,000w HID

Accessories

Ground Mount Stake with IntSTRral Through Wiring Junction Box (FLSTK), Glare Shields and Wire Guards available.

Refer to Specification Page for specific DLC certified Products.

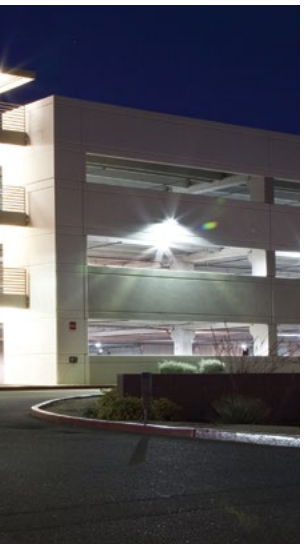

FULL CUTOFF WALL MOUNT APPLICATIONS

Large Stratus
STR45Q
177-281 Input Watts; 14,000-36,500 Lumens
Replaces up to 1,000w HID

Small Stratus
STR25Q
72-120 Input Watts; 6,000-16,000 Lumens
Replaces up to 400w HID

Mini Stratus
STR15Q
24-43 Input Watts; 1,620-4,900 Lumens
Replaces up to 175w HID

Architectural wall mount cutoff luminaires complete the Stratus family.

- Available with IES Types I, II, III, IV and V optics.
- Ideal mounting heights are 12 to 30 feet.
- Multiple mounting options including wall bracket, arm and yoke.
- LED 24w-281w; 70w to 1000w HID replacement.
- Control options include 3-pin or 7-pin twist lock photocell receptacle or motion sensor.
- 1-10V dimming driver standard, 120-277, 347, and 480VAC inputs available.

BUY AMERICAN ACT COMPLIANT

STRATUS FAMILY

ARCHITECTURAL AREA, FLOOD & WALL LIGHTING

Stratus Family is available with AmberLED.

AmberLED

TURTLE-SAFE

98•3•1 RAPID SHIP PROGRAM

SHIP **98%** of Published Cataloged Products	**3** days or LESS	Minimum Quantity of **1** ITEM

5 LOCATIONS

Tampa, FL
Vancouver, WA
Cerritos, CA
Walden, NY
Memphis, TN

BUY AMERICAN ACT COMPLIANT

DLC QPL LISTED

C SA US

150 Pemco Way • Wilmington, DE 19804 • Phone: 302-892-9000

For complete specifications, visit www.1882lighting.com

1882 LIGHTING
A QSSI Company

Rev. 092022