Puerto 1
LED Post Top

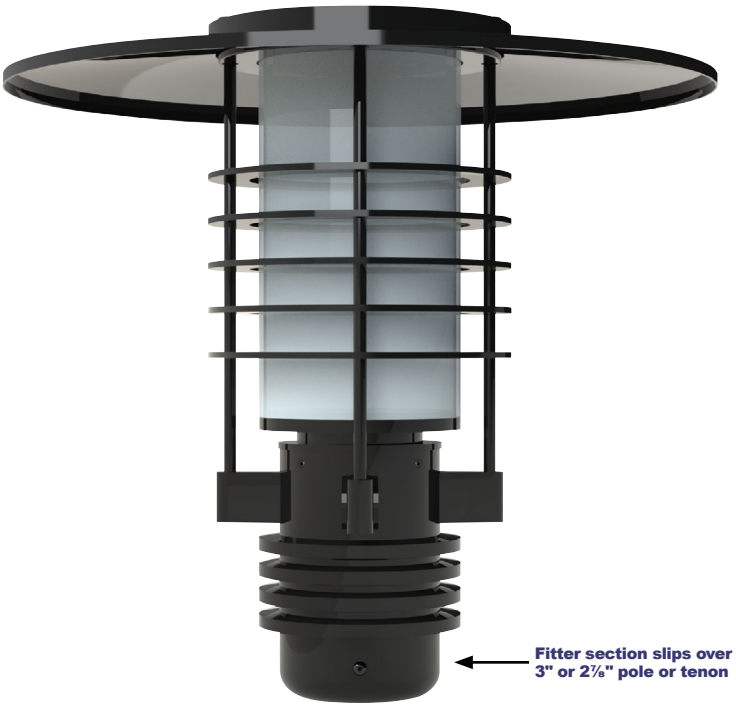

Puerto 1 with Lens, BC1 Shade (Optional, Adder) and 5 Cast Rings (Optional, Adder)

Puerto 1 with Lens, No Shade and No Cast Rings

Puerto 1 with No Lens, BC1 SM Shade and No Cast Rings

Specifications and Features:

Radiant™ LED
- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
- Static Colors Available - Contact Factory

Distribution
- Types II, III, IV, V

Electrical
- Electronic Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- 0-10V Dimmable Driver
- Standard Surge Protection Included (6kV line-line; 10k-V line-earth)

Controls (Optional)
- Button Eye Photo Control (PC)

Housing
- Cast Aluminum Housing with Rings
- Four Uprights

Finish
- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

Listings & Ratings
- ETL Listed to UL 1598 Standard for Wet Location.
- LED is IP66 Rated

Warranty
- 5 Year Limited Warranty

EPA: 2.78 (with Lens); 1.45 (noLens)
Weight: 28 lbs (Max.)

Order Information Example: PUT1CA5R40W3KU5BC1PTPCBZ

PUT1								PT		
Model	**Globe/Lens**	**Rings & Bands**	**Wattage**	**CCT**	**Voltage**	**Optics**	**Shades**	**Mounting**	**Options**	**Finish**
PUT1=Puerto 1	**CA**=Clear Acrylic **FA**=Frosted Acrylic **WA**=White (Opal) Acrylic **N**=No Secondary Lens	**5R**=5 Rings **N**=None	**10W**=10w **15W**=15w **20W**=20w **30W**=30w **40W**=40w **50W**=50w **60W**=60w	**3K**=3000K **4K**=4000K **5K**=5000K	**U**=120-277V **H**=347/480V	**2**=Type II **3**=Type III **4**=Type IV **5**=Type V	**BC1**=28" Shade **BC1-SM**=Small Shade, Top Mount **N**=None	**PT**=Post Top	**PC**=Button Eye Photo Control **H**=House Side Shield **N**=None	**STANDARD FINISHES** **BK**=Black **BZ**=Bronze **DBZ**=Dark Bronze **WH**=White **GR**=Green **SM**=Silver Metallic **GY**=Light Gray **TBK**=Textured Black **CC**=Custom Color (Consult Factory)

Puerto 1
LED Post Top

Photometric Data **For Lensed Fixtures**

8” Radiant™

6” Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Puerto 1								
Wattage (Catalog Logic)		**10 Watts (10W)**	**15 Watts (15W)**	**20 Watts (20W)**	**30 Watts (30W)**	**40 Watts (40W)**	**50 Watts (50W)**	**60 Watts (60W)**
Radiant Size (DIA.)		**6"**	**6"**	**6"**	**6"**	**8"**	**8"**	**8"**
Input Watts		**10.2**	**14.6**	**20.4**	**30.6**	**40.8**	**51.0**	**56.6**
Optic	**CCT**	**Delivered Lumens**						
2 = Type II Clear or Frosted	**3K**	1,344	1,763	2,352	3,527	4,703	5,878	7,055
	4K	1,371	1,800	2,400	3,600	4,800	6,001	7,200
	5K	1,392	1,828	2,437	3,655	4,874	6,091	7,310
	BUG Rating	B0-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2
3 = Type III Clear or Frosted	**3K**	1,342	1,760	2,348	3,521	4,695	5,869	7,043
	4K	1,369	1,797	2,396	3,595	4,792	5,991	7,188
	5K	1,390	1,825	2,433	3,649	4,866	6,081	7,298
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2
4 = Type IV Clear or Frosted	**3K**	1,312	1,721	2,296	3,443	4,591	5,739	6,887
	4K	1,339	1,758	2,343	3,515	4,686	5,858	7,029
	5K	1,359	1,784	2,379	3,569	4,758	5,947	7,136
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G2	B2-U3-G2	B2-U3-G2
5 = Type V Clear or Frosted	**3K**	1,373	1,801	2,402	3,603	4,804	6,005	7,207
	4K	1,401	1,839	2,452	3,678	4,903	6,130	7,355
	5K	1,423	1,867	2,489	3,734	4,979	6,222	7,467
	BUG Rating	B1-U2-G1	B1-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G1	B3-U3-G2
5 = Type V with White-Opal Lens	**3K**	964	1,446	1,928	2,893	3,857	4,821	5,785
	4K	984	1,477	1,969	2,953	3,937	4,921	5,906
	5K	999	1,499	1,998	2,998	3,997	4,997	5,996
	BUG Rating	B1-U3-G1	B1-U3-G1	B1-U3-G2	B1-U4-G2	B1-U4-G2	B2-U4-G3	B2-U5-G3

Please refer to the fixture's IES file for detailed information. Subject to change.

Puerto 1
LED Post Top

Photometric Data **For Open Full Cutoff Fixtures**

8” Radiant™

6” Radiant™

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Puerto 1 with No Secondary Lens								
Wattage (Catalog Logic)		10 Watts (10W)	15 Watts (15W)	20 Watts (20W)	30 Watts (30W)	40 Watts (40W)	50 Watts (50W)	60 Watts (60W)
Radiant Size (DIA.)		6"	6"	6"	6"	8"	8"	8"
Input Watts		10.2	14.6	20.4	30.6	40.8	51.0	56.6
Optic	CCT	Delivered Lumens						
2 = Type II Clear PC Lens	3K	1,099	1,634	2,179	3,268	4,358	5,447	6,537
	4K	1,112	1,668	2,224	336	4,448	5,560	6,672
	5K	1,129	1,634	2,258	3,387	4,516	5,644	6,774
	BUG Rating	B0-U0-G0	B1-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G1
3 = Type III Clear PC Lens	3K	1,142	1,713	2,284	3,427	4,569	5,711	6,853
	4K	1,165	1,749	2,332	3,497	4,664	5,829	6,996
	5K	1,183	1,776	2,367	3,550	4,734	5,919	7,102
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B2-U0-G2
4 = Type IV Clear PC Lens	3K	1,140	1,711	2,281	3,422	4,562	5,703	6,843
	4K	1,164	1,747	2,329	3,492	4,657	5,821	6,986
	5K	1,182	1,773	2,364	3,546	4,728	5,910	7,092
	BUG Rating	B0-U0-G0	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G3	B1-U0-G3
5 = Type V Clear PC Lens	3K	1,210	1,815	2,420	3,632	4,842	6,052	7,262
	4K	1,235	1,854	2,471	3,706	4,942	6,177	7,413
	5K	1,254	1,882	2,508	3,762	5,017	6,272	7,526
	BUG Rating	B1-U0-G0	B1-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G2

Please refer to the fixture's IES file for detailed information. Subject to change.

Puerto 1
LED Post Top

Accessories & Replacement Parts:

Accessories (Order Separately, Field Installed)	
SSBS	Stainless Steel Bird Spikes

Style Options

Puerto 1 with Lens, BC1 Shade and No Cast Rings

Puerto 1 with Lens, BC1 SM Shade and 5 Cast Rings

Puerto 1 with Lens, BC1 SM Shade and No Cast Rings

Puerto 1 with Lens, No Shade and 5 Cast Rings

Puerto 1 with Lens, No Shade and No Cast Rings

Puerto 1 with Lens, BC1 Shade and 5 Cast Rings

Puerto 1 with No Lens, BC1 Shade and 5 Cast Rings

Puerto 1 with No Lens, BC1 Shade and No Cast Rings

Puerto 1 with No Lens, BC1 SM Shade and 5 Cast Rings

Puerto 1 with No Lens, BC1 SM Shade and No Cast Rings

Puerto 1 with No Lens, No Shade and 5 Cast Rings

Puerto 1 with No Lens, No Shade and No Cast Rings

Puerto 1
LED Post Top
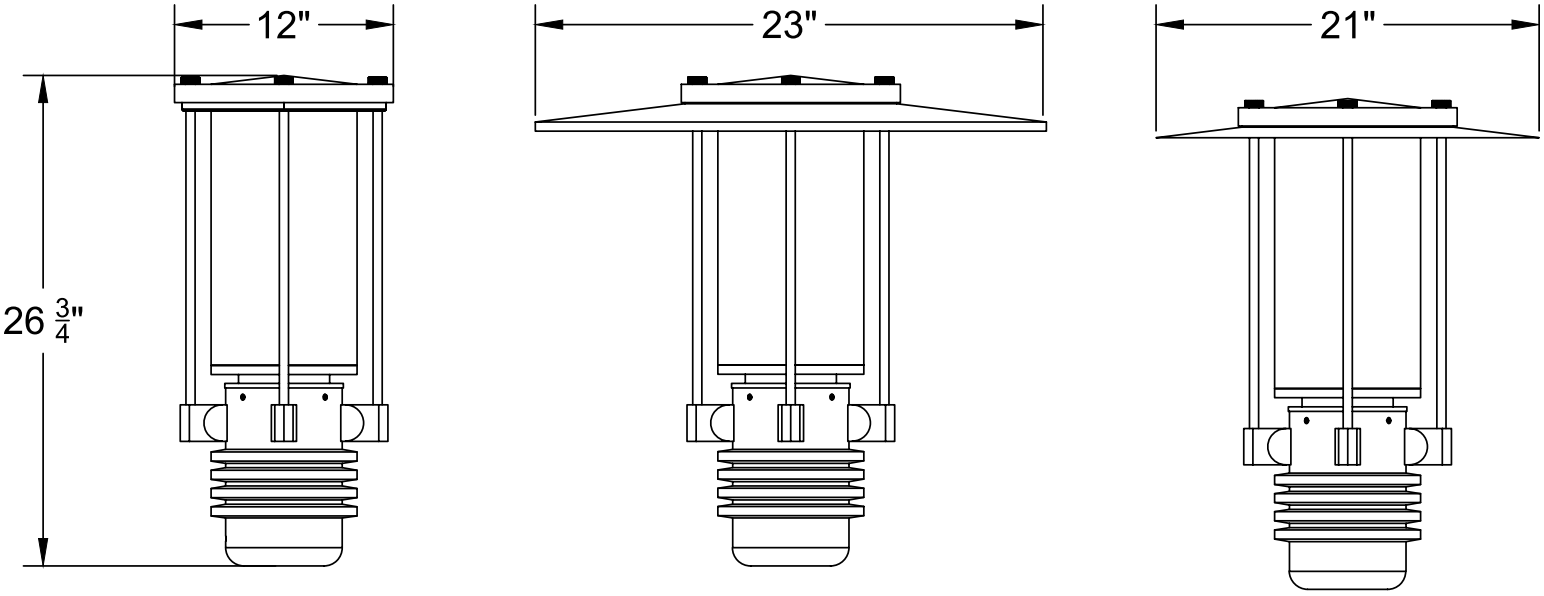
Dimensions