Victoria 1 & 2
LED Pendant Mount

VIC1

VIC2

Specifications and Features:

Radiant™ LED
- Conformal Coating LED light engine
- CCT: Standard-3000K, 4000K, & 5000K
- 2700K, Amber, LPS (1800K) Offered for Some Wattages - Consult Factory
- Static Colors Available - Contact Factory

Optical
- Types I, II, III, IV, V (Type I Available in 70w & Higher Only)
- Full Cutoff

Electrical
- Electronic 0-10v Dimmable Driver, 120-277V, 50/60Hz or 347/480V, 50/60Hz
- Standard Surge Protection Included (6kV Line-Line; 10k-V Line-Earth)

Controls (Optional)
- Button Eye Photo Control (PC)

Housing
- The Hinged Top Entry Housing is Held in Place with a Stainless Steel Latch. The Top Includes a Leveler for Knuckle Mounting.

Finish
- Super Durable Polyester Powder Coat Finish. Custom Finishes Available, Including Patinas and All RAL Colors.

Listings & Ratings
- ETL Listed to UL 1598 Standard for Wet Location.

Warranty
- 5 Year Limited Warranty

EPA: 2.37
Weight: 66 lbs (Max.)

Order Information Example: VIC1NDPG55W5KU5NBK

Model	Spinning	Globe/Lens	Wattage	CCT	Voltage	Optics	Options	Finish
VIC1=Victoria 1 Radiant™ Pendant **VIC2**=Victoria 2 Radiant™ Pendant	**N**=None **SKT**=Spun Short Skirt	**ADG**=Clear Acrylic Deep Globe **ASG**=Clear Acrylic Short Globe **PDG**=Polycarbonate Deep Globe **PSG**=Polycarbonate Short Globe **DPG**=Deep Borosilicate* ***Up to 90w Only.**	**10**=10w **15**=15w **20**=20w **30**=30w **40**=40w **50**=50w **60**=60w **70**=70w **80**=80w **90**=90w **105**=105w **120**=120w **135**=135w **155**=155w	**3K**=3000K **4K**=4000K **5K**=5000K	**U**=120-277V **H**=347/480V	**1**=Type I* **2**=Type II **3**=Type III **4**=Type IV **5**=Type V ***70w and Above Only**	**N**=None **PC**=Button Eye Photo Control	**STANDARD FINISHES** **BK**=Black **BZ**=Bronze **DBZ**=Dark Bronze **WH**=White **GR**=Green **SM**=Silver Metallic **GY**=Light Gray **TBK**=Textured Black **CC**=Custom Color (Consult Factory)

Victoria 1 & 2
LED Pendant Mount

Lumen Output

13” LED

12” LED

8” LED

6” LED

RADIANT™ LED LIGHT ENGINE SPECIFICATIONS:

Lumen Output for Victoria 1 & 2														
Wattage (Catalog Logic)		**10w (10W)**	**15w (15W)**	**20w (20W)**	**30w (30W)**	**40w (40W)**	**50w (50W)**	**60w (60W)**	**70w (70W)**	**80w (80W)**	**90w (90W)**	**105w (105W)**	**120w (120W)**	**135w (135W)**	**155w (155W)**
Radiant Size (DIA.)		**6"**	**6"**	**6"**	**6"**	**6"**	**8"**	**8"**	**12"**	**12"**	**12"**	**13"**	**13"**	**13"**	**13"**
Input Watts		**10.2**	**14.6**	**20.4**	**30.6**	**40.8**	**51.0**	**56.6**	**67.9**	**77.6**	**87.3**	**101.9**	**116.5**	**131.0**	**152.9**
Optic	**CCT**	**Delivered Lumens**													
1 = Type I Clear PC Lens	**3K**	NOT AVAILABLE							8,830	10,091	11,353	13,239	15,137	17,029	19,552
	4K								9,013	10,301	11,588	13,519	15,451	17,382	19,957
	5K								9,150	10,457	11,765	13,725	15,686	17,647	20,261
	BUG Rating								B3-U3-G2	B3-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
2 = Type II Clear PC Lens	**3K**	1,454	1,907	2,543	3,815	5,086	6,357	7,629	8,900	10,171	11,443	13,344	15,257	17,164	19,707
	4K	1,483	1,947	2,596	3,894	5,191	6,489	7,787	9,085	10,382	11,680	13,627	15,573	17,520	20,115
	5K	1,506	1,976	2,635	3,953	5,270	6,588	7,905	9,223	10,540	11,858	13,834	15,811	17,787	20,422
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
3 = Type III Clear PC Lens	**3K**	1,451	1,904	2,539	3,808	5,077	6,346	7,617	8,886	10,155	11,424	13,322	15,232	17,136	19,675
	4K	1,481	1,944	2,592	3,887	5,183	6,478	7,774	9,070	10,365	11,661	13,604	15,548	17,491	20,082
	5K	1,504	1,973	2,631	3,946	5,262	6,577	7,892	9,208	10,523	11,838	13,812	15,785	17,758	20,388
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U2-G1	B2-U3-G2	B2-U3-G2	B2-U3-G2	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3
4 = Type IV Clear PC Lens	**3K**	1,419	1,861	2,483	3,724	4,965	6,206	7,448	8,689	9,930	11,171	13,027	14,895	16,756	19,239
	4K	1,448	1,901	2,534	3,801	5,068	6,335	7,602	8,869	10,136	11,402	13,303	15,204	17,104	19,638
	5K	1,470	1,929	2,573	3,859	5,145	6,431	7,718	9,004	10,290	11,576	13,506	15,435	17,365	19,937
	BUG Rating	B1-U2-G1	B1-U2-G1	B1-U2-G1	B1-U3-G1	B1-U3-G1	B2-U3-G2	B2-U3-G2	B2-U3-G3	B2-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G3	B3-U3-G4
F = Type V Clear PC Lens	**3K**	1,485	1,948	2,598	3,897	5,195	6,494	7,793	9,092	10,390	11,689	13,631	15,585	17,533	20,131
	4K	1,515	1,989	2,652	3,977	5,303	6,628	7,955	9,280	10,606	11,931	13,920	15,908	17,897	20,548
	5K	1,539	2,019	2,692	4,038	5,384	6,729	8,075	9,421	10,767	12,113	14,132	16,151	18,170	20,861
	BUG Rating	B1-U2-G1	B2-U2-G1	B2-U2-G1	B2-U2-G1	B3-U3-G1	B3-U3-G2	B3-U3-G2	B3-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G2	B4-U3-G3	B4-U3-G3	B5-U3-G3

Please refer to the fixture's IES file for detailed information. Subject to change.

Victoria 1 & 2
LED Pendant Mount

Style Options

Victoria 1 - Short Globe, No Skirt

Victoria 1 - Deep Globe, No Skirt

Victoria 1 - Short Globe with Skirt

Victoria 1 - Deep Globe with Skirt

Victoria 2 - Short Globe, No Skirt

Victoria 2 - Deep Globe, No Skirt

Victoria 2 - Short Globe with Skirt

Victoria 2 - Deep Globe with Skirt

Victoria 1 & 2
LED Pendant Mount

Victoria 1 Dimensions

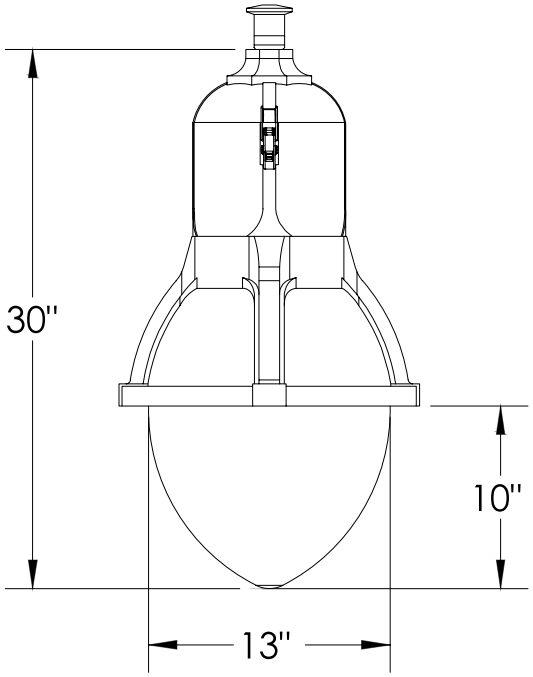

Victoria 1 - Short Globe, No Skirt

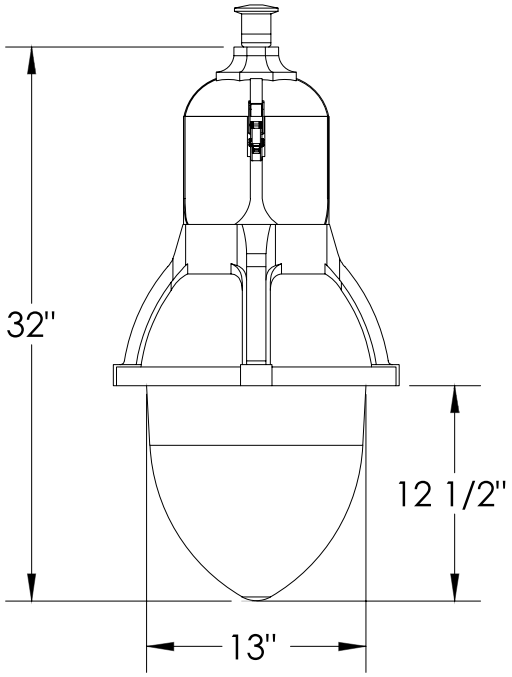

Victoria 1 - Deep Globe, No Skirt

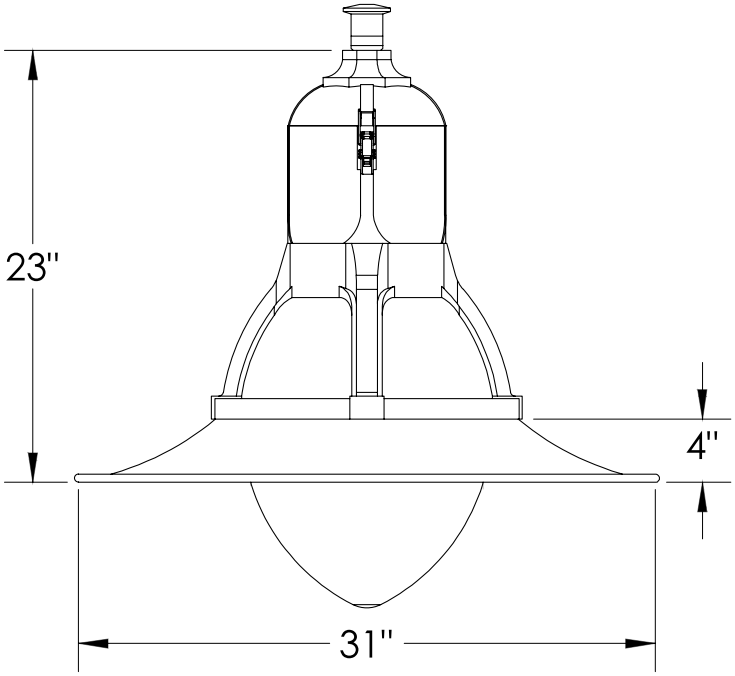

Victoria 1 - Short Globe with Skirt

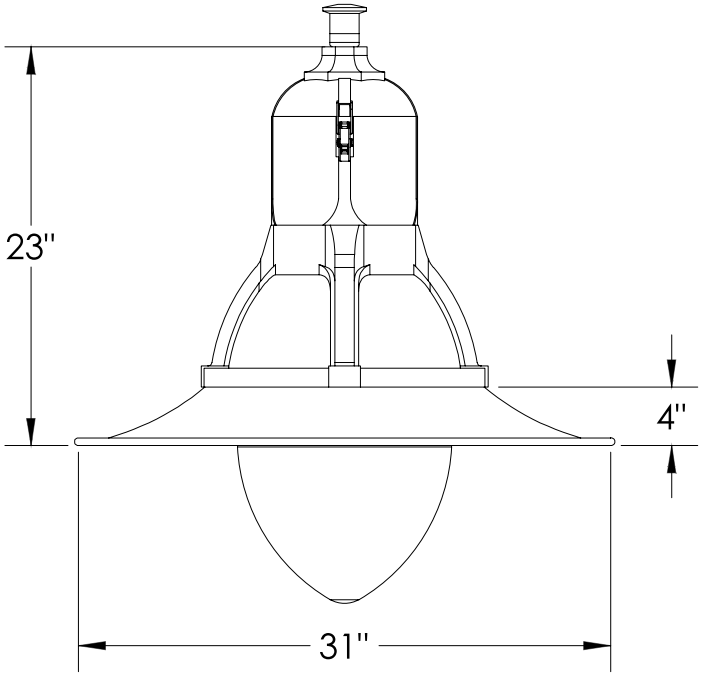

Victoria 1 - Deep Globe with Skirt

Victoria 1 & 2
LED Pendant Mount

Victoria 2 Dimensions

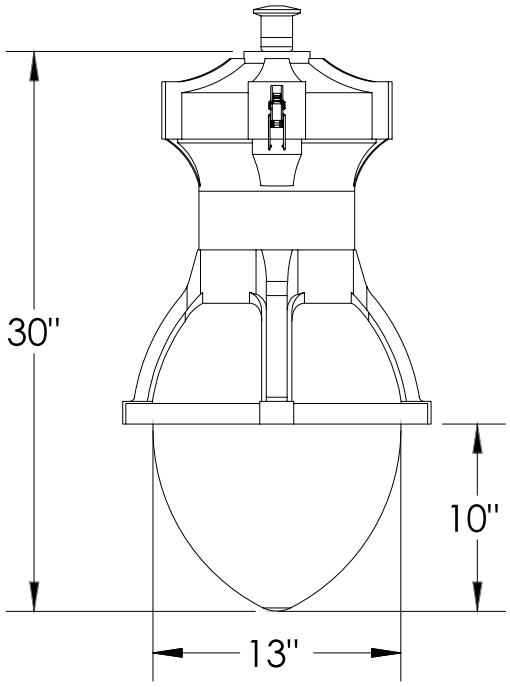

Victoria 2 - Short Globe, No Skirt

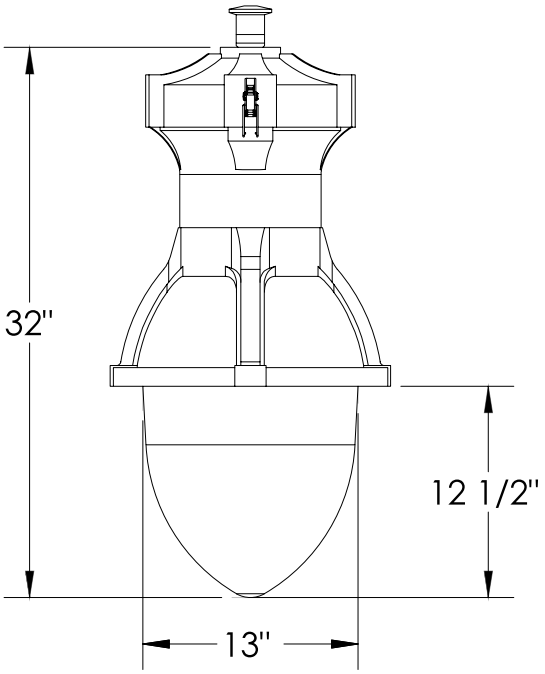

Victoria 2 - Deep Globe, No Skirt

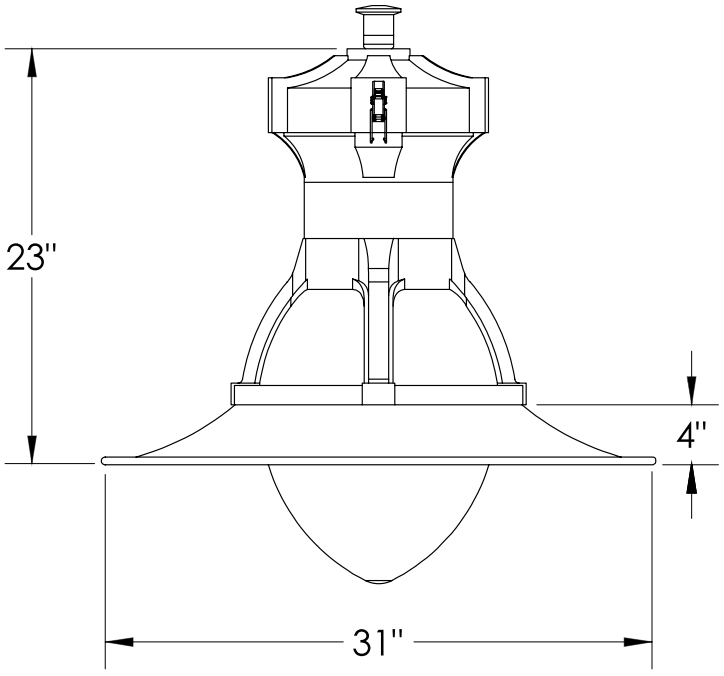

Victoria 2 - Short Globe with Skirt

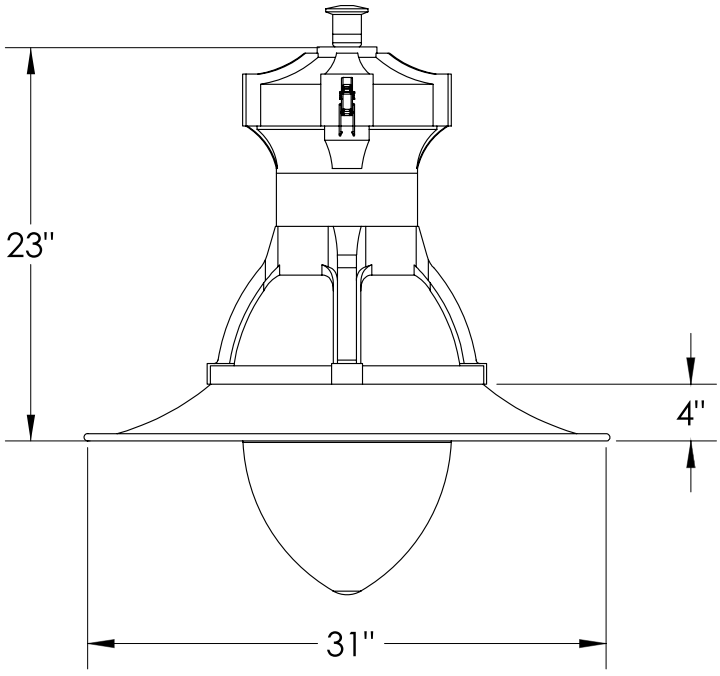

Victoria 2 - Deep Globe with Skirt